




This equipment is designed for applications where frequency translation is needed between L-band and the Ka-band transponder frequencies.

STANDARD FEATURES

- Amplitude slope adjust
- RS422, RS485 and 10/100 Base-T Ethernet
- Serial output for Redundancy Switchover units
- RF and L-band monitor ports
- Automatic 5/10 MHz internal/external reference selection
- Electronic adjust of internal reference frequency
- Low phase noise
- Low intermodulation distortion
- 45 dB of independent RF and L-band level control
- Mute function on alarm or external mute input command
- Elapsed time and event log after power turn on
- CE Mark

OPTIONS

- High performance package
- Lower gain
- Reference clean-up loop and improved stability
- Lower phase noise
(included in high performance package)

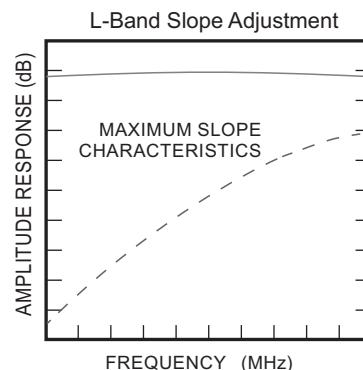

BLOCK UPCONVERTERS

Output (GHz)	Input (GHz)	LO (GHz)	Model Number
27.5-28.5	0.95-1.95	26.55	UBR-1.45-28
28.75-29.75	0.95-1.95	27.8	UBR-1.45-29.25
29-30	0.95-1.95	28.05	UBR-1.45-29.5
29.75-30.75	0.95-1.95	28.8	UBR-1.45-30.25
30-31	0.95-1.95	29.05	UBR-1.45-30.5
30-31	1-2	29	UBR-1.5-30.5

BLOCK DOWNCONVERTERS

Input (GHz)	Output (GHz)	LO (GHz)	Model Number
17.7-18.7	0.95-1.95	16.75	DBR-18.2-1.45
18.3-19.3	0.95-1.95	17.35	DBR-18.8-1.45
19-20	0.95-1.95	18.05	DBR-19.5-1.45
19.7-20.2	0.95-1.45	18.75	DBR-19.95-1.2
20.2-21.2	0.95-1.95	19.25	DBR-20.7-1.45
20.2-21.2	1-2	19.2	DBR-20.7-1.5

REVERSE BAND BLOCK UPCONVERTERS

Output (GHz)	Input (GHz)	LO (GHz)	Model Number
19.2-19.7	0.95-1.45	18.25	UBR-1.2-19.45
20.2-21.2	0.95-1.95	19.25	UBR-1.45-20.7

REVERSE BAND BLOCK DOWNCONVERTERS

Input (GHz)	Output (GHz)	LO (GHz)	Model Number
30-31	0.95-1.95	29.05	DBR-30.5-1.45
30-31	1-2	29	DBR-30.5-1.5

SPECIFICATIONS

INPUT CHARACTERISTICS -	UPCONVERTER	DOWNSAMPLER					
Return Loss (50 Ohms)	18 dB minimum	18 dB minimum					
Signal Monitor		-20 dBc nominal					
LO Leakage	N/A	-80 dB maximum					
Input Level (Non-damage)		+10 dBm					
OUTPUT CHARACTERISTICS -							
Return Loss (50 ohms)	18 dB minimum	18 dB minimum					
Signal Monitor		-20 dBc nominal					
Power Output (1 dB Compression)	+13 dBm minimum	+18 dBm minimum					
TRANSFER CHARACTERISTICS -							
Gain	33 dB, ±3 dB at center frequency	36 dB, ±3 dB at center frequency					
L-band Level Control		30 dB in 0.2 dB steps					
RF-band Level Control		15 dB in 0.2 dB steps					
Level Stability		±0.25 dB over any 20°C, ±1.5 dB over -40° to 60°C					
Amplitude Response		±0.25 dB/40 MHz maximum, ±1 dB maximum over RF frequencyband					
Slope Adjust		0 to 6 dB minimum					
Noise Figure at Minimum Attenuation	15 dB maximum 18 dB maximum ≥ 1 GHz IF bandwidth	15 dB maximum at maximum gain					
Image Rejection		70 dB minimum					
Third Order Intermodulation Distortion With two inband signals each at 0 dBm, measured at the output	50 dBc minimum (+25 dBm IP3)	60 dBc minimum (+30 dBm IP3)					
Spurious Outputs (Inband) –							
Signal Related up to 0 dBm output		65 dBc minimum					
Signal Independent		-75 dBm maximum					
Signal Harmonic Related up to -10 dBm output	65 dBc minimum (including 2 x 1 spurious on IF bandwidths ≥ 1 GHz)	55 dBc minimum (Including 2nd harmonic)					
Maximum Phase Noise (dBc/Hz) –		Offset (Hz)					
With Maximum Reference Phase Noise:	LO Frequency	10	100	1K	10K	100K	1M
10 Hz: -120 dBc/Hz	16 to 20 GHz	-55	-75	-85	-85	-97	-120
100 Hz: -145 dBc/Hz	Up to 30 GHz	-55	-75	-80	-85	-95	-118
1 kHz: -160 dBc/Hz							
Frequency Stability		±2 × 10 ⁻⁸ , 0° to 50°C (reference 25°C)					
Frequency Aging		5 × 10 ⁻⁹ /Day after 24 hours on time					
Automatic Reference Configuration		External 5 or 10 MHz at +4 ±3 dBm. If external reference is below +1 dBm nominal, the converter will automatically lock to the internal reference.					
Converter Mute		60 dB minimum on summary alarm or mute command.					
REMOTE CONTROLS							
Serial Interface	RS485/RS422						
Ethernet Interface	10/100Base-T Ethernet	<ul style="list-style-type: none"> • HTTP-based web • SNMP 1.0 • Alarm reporting via SNMP • Telnet access • Password protection 					
INDICATORS and ALARMS							
Status Indicator		Red LED: Alarm, Yellow LED: External Reference					
Power ON Indicator		Green LED					
Summary Alarm		Contact closure/open for DC voltage and local oscillator					

Note: All specifications are at maximum gain unless otherwise noted.

OPTIONS

-1. High Performance Package -

Power Output (1 dB Compression)	+15 dBm minimum
Gain Slope	0.03 dB/MHz maximum
Level Stability	±0.25 dB/day maximum at constant temperature, ±1.0 dB maximum/-40 to 60°C
Group Delay	1 ns peak-to-peak maximum
Spurious Outputs (Inband)	
.....	Signal Related-65 dBc minimum at 0 dBm output
.....	Signal Independent-80 dBm maximum
Local Oscillator Leakage.....	-65 dBm maximum (upconverters only)
Image Rejection	80 dB minimum
Intermodulation Distortion (Third Order)	With two inband signals at 0 dBm output, third order intermodulation products are less than 60 dBc minimum.

High Performance Phase Noise (dBc/Hz) (Maximum) -

LO Frequency	Offset (Hz)					
	10	100	1K	10K	100K	1M
≤ 20 GHz	-47	-70	-98	-103	-106	-127
≤ 30 GHz	-40	-65	-90	-100	-102	-124

AM/PM Conversion (at 0 dBm Output)	0.1°/dB maximum
Upconverter Mute.....	80 dB minimum on summary alarm, external mute input control or remote command
-2. Lower Gain.....	20 ±3 dB at 23°C, 18 dB noise figure (20 dB noise figure for upconverters with 1 GHz bandwidth) (2 x 1 signal related, 65 dBc at -10 dBm output)
-3. Lower Gain.....	10 ±3 dB at 23°C, 20 dB noise figure (22 dB noise figure for upconverters with 1 GHz bandwidth) (2 x 1 signal related, 65 dBc at -10 dBm output)
-4. Reference Clean-up Loop and Improved Frequency Stability	Reference oscillator acts as an analog phase lock with a 0.1 Hz nominal loop bandwidth. Typical loop suppression of the external reference is as follows: 28 dB at 1 Hz offset; 65 dB at 10 Hz offset and 100 dB at 100 Hz offset Internal oscillator phase noise 10 Hz at -130 dBc/Hz; 100 Hz at -155 dBc/Hz and 1 KHz at -165 dBc/Hz Frequency Stability: ±2 × 10 ⁻⁹ , 0 to 50°C Frequency Aging: 1 × 10 ⁻⁹ per day after 24 hours operation proceeded by 10 days operation
-5. Waveguide connector	WR-28 O-Ring located on rear panel. Upconverters only.

PRIMARY POWER REQUIREMENTS

Voltage..... 90-250 VAC
Frequency..... 47-63 Hz
Consumption..... 40W typical
Fuse..... T1.25A

PHYSICAL

Weight..... 9 pounds (4.08 kg) nominal without rack slides
13 pounds (5.9 kg) nominal with rack slides
Chassis Dimensions..... 19" x 1.75" panel height x 20" maximum
Connectors-
RF 2.92 mm female
L-band SMA female
RF Monitor SMA female compatible
L-band Monitor SMA female
External Reference BNC female
Summary Alarm..... DE-9S
Remote Interface DE-9S for RS485, RS422
RJ-45 female for Ethernet
Primary Power IEC-320
Redundancy Interface DE-9P

ENVIRONMENTAL

Operating-

Ambient Temperature 0 to 50°C
Relative Humidity Up to 95% at 30°C
Altitude Up to 10,000 feet

Non-operating—

Ambient Temperature -50 to +70°C
Relative Humidity Up to 95% at 45°C
Altitude Up to 40,000 feet
Shock and Vibration Normal handling by commercial carriers